


VITALink®

14 AWG Solid 2/C Non-Shielded Circuit Integrity Cable

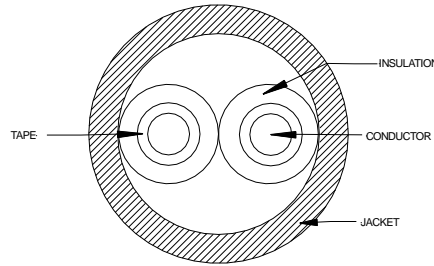

1. Construction:

- 1.1. Conductors: 14 AWG (2.1 mm²) Solid Bare Copper, 0.064" (1.62 mm) Nominal Diameter
- 1.2. Tape: Flame Retardant Tape
- 1.3. Insulation: Low Smoke Zero Halogen Thermoset Fire-Roc® Insulation 0.142" (3.60 mm) Nominal Diameter & 0.029" (0.73 mm) Nominal Wall Thickness
- 1.4. Color Code: Red, Black
- 1.5. Cable Assembly: Cable (2) Conductors Nominal 5" (127mm) LHL
- 1.6. Jacket: Non Halogen Flame Retardant Polyolefin Compound, Nominal Overall Diameter, 0.352" (8.94 mm), Nominal Wall Thickness 0.034" (0.86 mm) Color: RED
- 1.7. Jacket Print:
COMTRAN LSZH VITALink® FPLR-CI-ST1 CL3R-CI-ST1 2/C 14AWG 105C SUN RES WET or FAS105 LL14444 FRR-2HR FHIT.40A/FHIT7.40A UL2196/ULC S139 MAX VOLTAGE 72V PN36338 --- NYC APPROVED (MMYY) 000002 (01-12345)

NOTE: MMY is 4 Digit Month/Year Sequential Footage Markings Every Two Feet (01-12345)- Traceability Marking

2. Compliance:

- 2.1. (UL) Listed Type FPLR-CI-ST1
- 2.2. (UL) Listed CL3R-CI-ST1
- 2.3. CSA Listed FAS 105
- 2.4. UL Subject 1424 Power Limited Fire Alarm Circuits;300V/105°C Classified
- 2.5. UL Subject 13 Power Limited Circuit Cables; 300V/105°C Classified
- 2.6. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System 40A
- 2.7. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for use in FHIT7 System 40A
- 2.8. NFPA 70 & 72
- 2.9. NFPA 130
- 2.10. NFPA 502
- 2.11. California State Fire Marshal Approved
- 2.12. NYC Electrical Advisory Board #54502, April 2017
- 2.13. RoHS Compliant

3. Physical Characteristics:

- 3.1. Nominal Weight per 1000 FT: 61 Lbs. (27.6 kg)
- 3.2. Min Bend Radius: 3" (76.2 mm)
- 3.3. Maximum Pull Tension – Straight runs: 66 Lbs. /Ft. (30 kg/Ft.)
- 3.4. Passes Cold Bend Test @ -20C

4. Electrical Characteristics:

- 4.1. Nominal Conductor DCR @ 68F (20 °C): 2.57Ω / 1000 Ft.
- 4.2. Nominal Capacitance C-C: 20pF/Ft.

TITLE:		DESCRIPTION:		COMTRAN		COMTRAN <small>Innovative Systems. Engineered Solutions.</small>	
DS36338		14 AWG Solid 2 Conductor VITALink® Non-shielded Circuit Integrity Cable		330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		<small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>	
Rev	Date	Detail	Eng.	App.			
09	05/12/20	Update legend per UL change	PB	KB		ECN 20-042	
08	07/09/19	Change legend per UL update; add electrical data	PB	WC		ECN 19-071	
07	02/27/19	Add regulatory approvals	PB	WC			
06	01/29/19	Change logo and basic corrections	SM	PB			
05	10/31/18	Add LL# to print	PB	WC		ECN 18-118	
04	05/24/18	FAS 90 to 105	PB	WC		ECN 18-067	

Comtran reserves the right to change the information above without prior notification. Comtran Cable assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document