


VITALink®

12 AWG Stranded 2/C Non-Shielded Circuit Integrity Cable

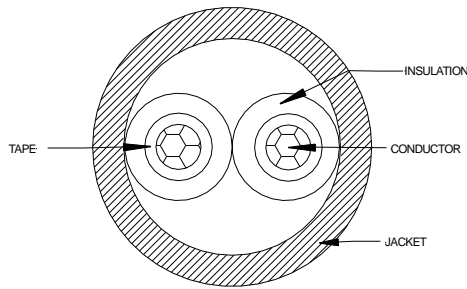

1. Construction:

- 1.1. Conductors: 12 AWG (3.30 mm²) Stranded Copper, 0.0879" (2.23 mm) Nominal Diameter
- 1.2. Tape: Flame Retardant Tape
- 1.3. Insulation: Low Smoke Zero Halogen Thermoset Fire-Roc® Insulation 0.167" (4.24 mm) Nominal Diameter & 0.029" (0.73 mm) Nominal Wall Thickness
- 1.4. Color Code: Black, Printed
- 1.5. Cable Assembly: Cable (2) Conductors Nominal 6.00" (152 mm) LHL
- 1.6. Jacket: Non Halogen Flame Retardant Polyolefin Compound, Nominal Overall Diameter, 0.416" (10.57 mm), Nominal Wall Thickness 0.042" (1.06 mm) Color: RED

1.7. Jacket Print:

COMTRAN LSZH VITALink® FPLR-CI-ST1 CL3R-CI-ST1 2/C 12AWG 105C SUN RES WET or CSA FAS105 LL14444 FRR-2HR FHIT.40A/FHIT7.40A UL2196/ULC S139 MAX VOLTAGE 72V PN36339 --- NYC APPROVED (MMYY) 000002 (01-12345)

NOTE: MMY is 4 Digit Month/Year Sequential Footage Markings Every Two Feet (01-12345)- Traceability Marking

2. Compliance:

- 2.1. (UL) Listed Type FPLR-CI-ST1
- 2.2. (UL) Listed CL3R-CI-ST1
- 2.3. CSA Listed FAS 105
- 2.4. UL Subject 1424 Power Limited Fire Alarm Circuits;300V/105°C Classified
- 2.5. UL Subject 13 Power Limited Circuit Cables; 300V/105°C Classified
- 2.6. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System 40A
- 2.7. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for use in FHIT7 System 40A
- 2.8. NFPA 70 & 72
- 2.9. NFPA 130
- 2.10. NFPA 502
- 2.11. California State Fire Marshal Approved
- 2.12. NYC Electrical Advisory Board #54502, April 2017
- 2.13. RoHS Compliant

3. Physical Characteristics:

- 3.1. Nominal Weight per 1000 FT: 92 Lbs. (41.7 kg)
- 3.2. Min Bend Radius: 4" (101.6 mm)
- 3.3. Maximum Pull Tension – Straight runs: 104 Lbs. /Ft. (47.1 kg/Ft.)

4. Physical Characteristics:

- 4.1. Nominal Conductor DCR @ 68F (20 °C): 1.6Ω / 1000 Ft.
- 4.2. Nominal Capacitance C-C: 20 pF/Ft

TITLE:		DESCRIPTION:		COMTRAN		COMTRAN <small>Innovative Systems. Engineered Solutions.</small>	
DS36339		12 AWG Stranded 2 Conductor VITALink® Non-shielded Circuit Integrity Cable		330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		<small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>	
Rev	Date	Detail	Eng.	App.			
09	09/20/21	Update to reflect use of 7 strand copper	PB	KB	ECN 21-058		
08	05/12/20	Update legend per UL changes	PB	KB	ECN 20-042		
07	07/09/19	Change legend per UL update; add electrical data	PB	WC	ECN 19-071		
06	02/27/19	Add regulatory approvals	PB	WC			
05	01/29/19	Change logo and basic corrections	SM	PB			
04	10/31/18	Add LL# in print	PB	WC	ECN 18-118		

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document