


VITALink®

18 AWG 3-Pair UTP Ethernet Cable – Patent Pending

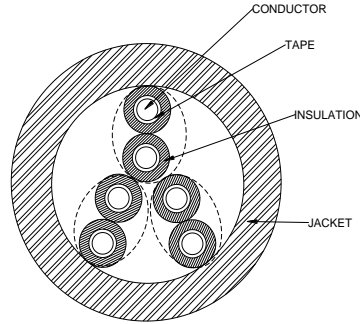

1. **Construction:**

- 1.1. Conductors: 18 AWG Solid Bare Copper 0.040”
Nominal Diameter (1.01 mm)
- 1.2. Tape: Flame Retardant Tape
- 1.3. Insulation: LSZH Thermoset Fire-Roc™, 0.090”
(2.29 mm) Nominal Diameter, 0.015”
(0.38 mm) Nominal Wall Thickness
- 1.4. Pairs: Conductors Twisted to Varying Lays
- 1.5. Color: White & Black Printed
- 1.6. Cable: Cable 3 Pairs
- 1.7. Jacket: Red Non-Halogen Flame Retardant Polyolefin,
0.379” (9.63 mm) Nominal Diameter,
Nominal Wall Thickness, 0.034” (0.87 mm)

1.8. **Jacket Print:**

COMTRAN LSZH VITALink® c(UL)us CMR-ST1 or (UL)
CL3R-ST1 3P18 AWG 105C FT4 SUN RES WET
FRR-2HR FHIT.40A/FHIT7.40A UL2196/ULC S139 MAX
VOLTAGE 72V PN 36610 (MMYY) 000002 (01-12345)
PATENT PENDING

MMYY is 4 Digit Month/Year
(01-12345) = Traceability Code
000002 FT – Sequential Footage every 2 feet

2. **Compliance:**

- 2.1. c(UL)us Listed Type CMR-ST1
- 2.2. (UL) Listed CL3R-ST1
- 2.3. UL Subject 444 Communications Cable, 300V/105°C
Classified
- 2.4. UL Subject 13 Power Limited Circuit Cables; 300V/105°C
Classified
- 2.5. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System
40A
- 2.6. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for
use in FHIT7 System 40A
- 2.7. NFPA 70 & 72
- 2.8. NFPA 130
- 2.9. California State Fire Marshal Approved
- 2.10. RoHS Compliant

3. **Electrical Characteristics:**

- 3.1. Meets Category 3 Channel Requirements per TIA-568.2-D
throughout UL2196 Flame and Hose Stream Testing
- 3.2. DC Resistance of Conductor: 6.52 Ω/1000' Nominal

4. **Physical Characteristics:**

- 4.1. Cable Weight: 71 Lbs./1000 Ft.
- 4.2. Min Bend Radius: 3.75”
- 4.3. Maximum Pull Tension – Straight Runs: 78 Lbs.

TITLE:		DESCRIPTION:		COMTRAN		COMTRAN <small>Innovative Systems. Engineered Solutions.</small>	
DS36610		18AWG 3-Pair UTP VITALink® Ethernet Cable – Patent Pending		330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		<small>A Marmon Wire & Cable/ Berkshire Hathaway Company</small>	
Rev	Date	Detail	Eng.	App.			
7	1/10/22	Primary color change to white	BD	PB	ECN 21-055		
6	11/10/21	Updated '-C.2' to '.2-D' per TIA standard	BD	PB	ECN 21-049		
5	09/07/21	Update UL CM listing to ST1	PB	KB	ECN 21-055		
4	05/20/20	Remove CMG in print for clarity	PB	DM			
3	04/22/20	Add CMG	PB	WC			

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document