


14 AWG 2 Conductor Riser Sound and Security Cable

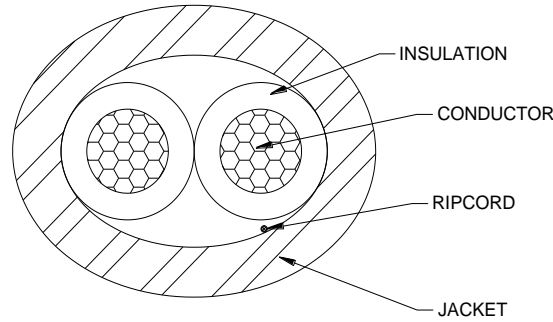

1. Construction:

- 1.1. Conductors: 14 AWG Stranded Bare Copper 0.071" Nominal Diameter
- 1.2. Insulation: Polyvinyl Chloride, 0.092" Nominal Diameter
- 1.3. Color Code: Black, White
- 1.4. Cable: Cable 2 Conductors
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Gray Polyvinyl Chloride, 0.212" Nominal Diameter

1.7. Jacket Print:

COMTRAN 14 AWG CL3R/FPLR (UL) RoHS
(01-12345) 000002



(01-12345) = Traceability Code
Sequential Footage Markings Every Two Feet

2. Compliance:

- 2.1. UL Subject 13, Power Limited Circuit Cable
- 2.2. UL Subject 1424, Power Limited Fire Alarm Circuit Cable
- 2.3. UL 1666, Riser Flame Test
- 2.4. NEC Article 725 and 760
- 2.5. (UL) Listed Types CL3P and FPLP
- 2.6. California State Fire Marshal Approved
- 2.7. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Capacitance C-C: 25 pF/FT. Nom @ 1 MHz
- 3.2. Voltage : 300 Volts

TITLE:		DESCRIPTION:		COMTRAN 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 COMTRAN <small>Innovative Systems. Engineered Solutions.</small>  <small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>
DS32840		14AWG 2 Conductor Riser Sound and Security Cable				
Rev	Date	Detail	Eng.	App.		
10	12/27/18	Change logo and basic corrections	SM	PB		
9	01/05/18	Update to Diameters; current format	PB	WC	ECN 18-003	
8	10/06/09	Add Voltage Info	2me	RHW		
7	08/11/06	Add Ripcord, Revise ODs add dual rating and RoHS to print	2me	RHW		
6	04/21/05	Revised and redrawn	2me	RHW		
5	01/27/03	Revised and redrawn	2me	RHW		

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document